SETON

Technical card

60G (227L) Cabinet datasheet

Technical description

Regulatory Approval/Code Reference	
OSHA 29 CFR 1910.106(e)(2)(ii)(b)	Incidental storage or use of flammable and combustible liquids
OSHA 29 CFR 1910.106(d)(3)(i&ii)	Design, construction, and capacity of storage cabinets - (i) Maximum capacity
International Fire Code	3404.3.2 - Liquid storage cabinets, 3404.3.2.1.1- Material
	3404.3.2.1.2 - Labeling, 3404.3.2.1.3 - Doors, 3404.3.2.1.4 Bottom
NFPA 1, The Uniform Fire Code –2006 Edition	60.1.2.23 Hazardous Materials Storage Cabinets
NFPA Code 30 – 2008 Edition	Chapter 9
The National Fire Code of Canada (NFC) 1995 Edition	Section 4.2.10.5 references storage cabinets must conform to ULC-C1275
	ULC/ORD-C1275-84
FM Global	#6050
FM Global	FM APPROVED

Description product

- Capacity: 227 L Cabinet.
- Exterior Dimensions (H x W x D): 1657 mm x 864 mm x 864 mm.
- Interior Dimensions (H x W x D): 1553 mm x 783 mm x 783 mm.
- Door Opening Dimensions (H x W): 1502 mm x 779 mm.
- Material Specifications: Cabinet architecture is 18ga steel thought, with fully welded construction. 2" leak tight sump, continuous door hinge Galvanized spill slope shelves. Powder coat finish: 2.4 to 2.5 mills avg.
- Package Dimensions (H x W x D): 1778 mm x 965 mm x 965 mm.
- Spill Containment Sump: 31.44 L.
- Estimated Ship Weight: 169.6 Kg.
- Number of Shelves: 2.
- Shelf Load: 159 Kg.
- Justrite standard color options: Yellow.

List of Cabinets sku's

- ARSE CJM3: 60G CAB MAN YL FLAM SAFE EX.
- ARSE CJA3: 60G CAB SC YL FLAM SAFE EX.
- Any modification to a cabinet will void any FM Approval and warranty.

SETON

Technical card
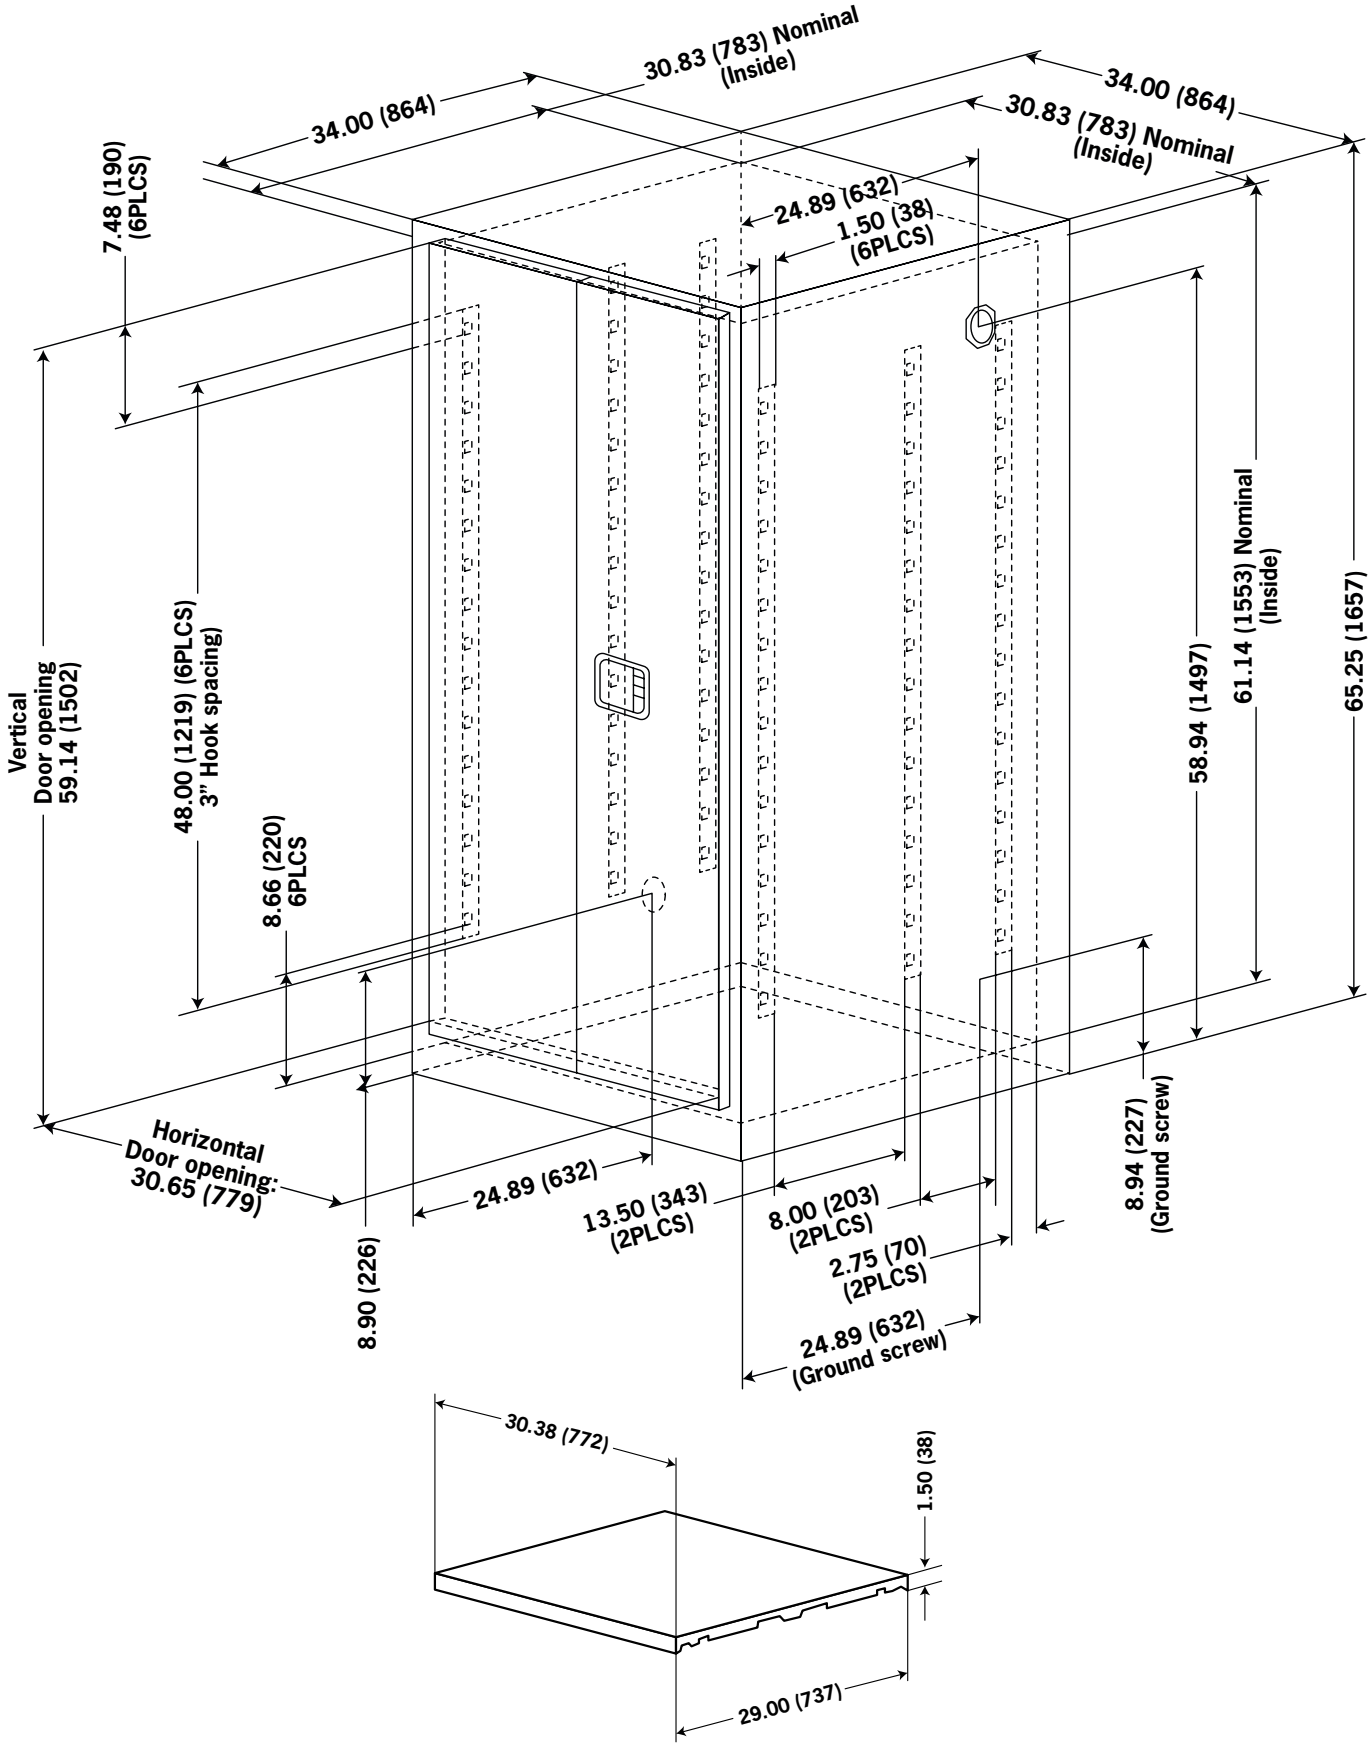
60G (227L) Cabinet datasheet